



3.05

MagFlux®

ELECTROMAGNETIC FLOW METER

General

MagFlux® Electromagnetic Flow Meters deliver very stable and highly accurate flow measurements in conductive liquids.

MagFlux® Flow Meters have no moving parts to create hydraulic influence on the flow, use a well-proven technology refined by MJK and communicate using a standard protocol.

MagFlux® Flow Sensors are available in sizes ranging from DN 15 to DN 2000*, with standard construction lengths and connections. The MagFlux® Flow Meter, which makes the calculations of the flow, can be installed either with the converter mounted on the MagFlux® Flow Sensor, on a wall or mounted in a panel.

MagFlux® Q is a special edition of MagFlux® produced in composite materials and particularly suitable for salt water and low flowrate measurements. Its construction without external metal parts makes MagFlux® Q the perfect solution for installations where there is corrosion. MagFlux® Q is available from DN50 to DN150.

Features

- One graphic display can operate up to four MagFlux® Flow Meters.
- Intuitive menu structure with easy navigation.
- Built-in datalogger with the display.
- Large dynamic measuring range with an accuracy of up to $\pm 0,25\%$.
- Two dynamic batch counters and password protection.
- Counters and pulse output with or without reset.
- 4-20 mA output for flow in one or both directions.
- Detection of empty pipe and automatic electrode cleaning.
- Full bore bi-directional sensor.
- Modbus® communication is utilized between the display and flow converter and to other external devices.

Features - MagFlux® Q

- Low weight.
- Sensor in PPS Fortron and Hastelloy C electrodes.
- Ideal for applications with saline water, e.g. aquaculture.
- Fully integrable with classic MagFlux® sensors and converters.

Applications

MagFlux® is used to measure and log conductive fluids (drinking water, wastewater and process fluids) in both directions in closed and possibly pressurized pipe systems.

In addition, MagFlux® Q is used for installations with saline and/or seawater (even heated). And the high precision at very low speed makes MagFlux® Q perfect for district wells where night flow measurement can eliminate water loss even at very small leaks.

* Does not apply to MagFlux® Q.

DATASHEET


EN 3.05 MAGFLUX DATASHEET 2109



mjk //
a xylem brand

MagFlux® Electromagnetic Flow Meter

Function

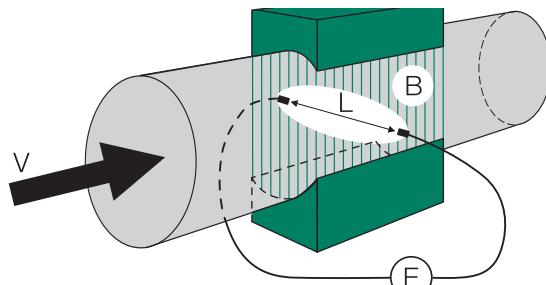

The MagFlux® operation is based on Faraday's law of induction. When a conductive fluid passes through a magnetic field in the sensor, an electromagnetic voltage is induced between the two electrodes in the flow sensor tube. This voltage (E) is directly proportional to the fluid velocity.

When the internal diameter of the flow sensor is known, the actual volume is calculated by the converter.

The electromagnetic voltage induced between the electrodes equates to:

$$E = L \times B \times V$$

E: Induced electromagnetic voltage

L: Flow sensor diameter

B: The strength of the magnetic field

V: The velocity of the liquid

The voltage E is measured and consequently converted to a volumetric flow.

Flexible Installation

MJK's modular design is versatile. The MagFlux® Display Unit can be mounted up to 1000 m from the MagFlux® Flow Converter with ordinary twisted wires. It also provides options for mounting the Converter where it is most convenient to make the electrical connections.


For greater economy, space savings and an improved overview of the multiple measurement values, one MagFlux® Display Unit can control up to four MagFlux® Converters and MagFlux® Flow Sensors



The MagFlux® Converter and Display Unit mounted directly on the MagFlux® Flow Sensor.



The MagFlux® Converter mounted directly on the MagFlux® Flow Sensor with a remotely mounted MagFlux® Display Unit.

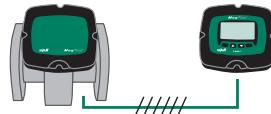

The MagFlux® Converter and MagFlux® Display Unit remotely mounted. For example, when the sensor is buried or submerged.



The MagFlux® Converter mounted remotely from the MagFlux® Flow Sensor, and the MagFlux® Display Unit mounted separately from the Converter. E.g. when the MagFlux® Sensor is buried



The MagFlux® Converters mounted directly on the MagFlux® Flow Sensors, while the remotely mounted MagFlux® Display Unit communicates with two MagFlux® Converters and MagFlux® Flow Sensors.

MagFlux® Electromagnetic Flow Meter

Simple to Operate

The MagFlux® Display Unit has many unique and intelligent functions. It has a simple menu structure and can display text in several selectable languages in metrics or English units.



Registering the MagFlux® Flow Sensor

The MagFlux® system registers the MagFlux® Flow Sensor to the MagFlux® Converter using a unique coded sensor. It sets calibration data, the nominal diameter and the sensor configuration - making the MagFlux® system ready to measure immediately. This avoids complicated and sensitive field calibrations and delicate electronic adjustments of the sensor, and allows unlimited interchanging of MagFlux® Converters and MagFlux® Flow Sensors.



Counters for Flow in both Directions

The MagFlux® Converter has resettable and non-resettable counters for flow in both directions.

MagFlux® has two batch counters with smart-batch counting.




Forward and Backwards Flow Measurement and Totalizing

The MagFlux® system measures flow in both directions and can totalize the net flow for both. A simple menu selection determines the primary flow direction.



Data Logger

The MagFlux® built-in data logger can log up to 345.000 entries with time and date. Data is displayed graphically, but can also be exported to a PC via the USB port on the MagFlux® Display Unit.

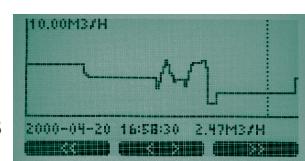

Field Link Easy-to-use Software

The MagFlux® PC connection allows exporting logged data to a PC, and importing new software updates. All through intuitive steps using a common USB port.

Flexible In- and Outputs


The MagFlux® Converter has one 4-20 mA active analogue output, two digital outputs and one digital input. The digital input can stop and zero counter settings or control the batch counters manually. Each alarm can be displayed as a pop-up alarm until they are reset.

Automatic Electrode Cleaning

The MagFlux® built-in electronic electrode cleaning system is always active.

User Definable Text

The MagFlux® Display can be configured by the user for up to five lines of text. The graphic display is automatically adjusted to show the largest characters possible.

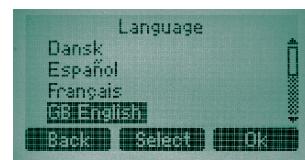


Modbus® Communication

The display and converter uses the Modbus® communication protocol for internal and external communication.




MagFlux® Electromagnetic Flow Meter


Electrical Connection

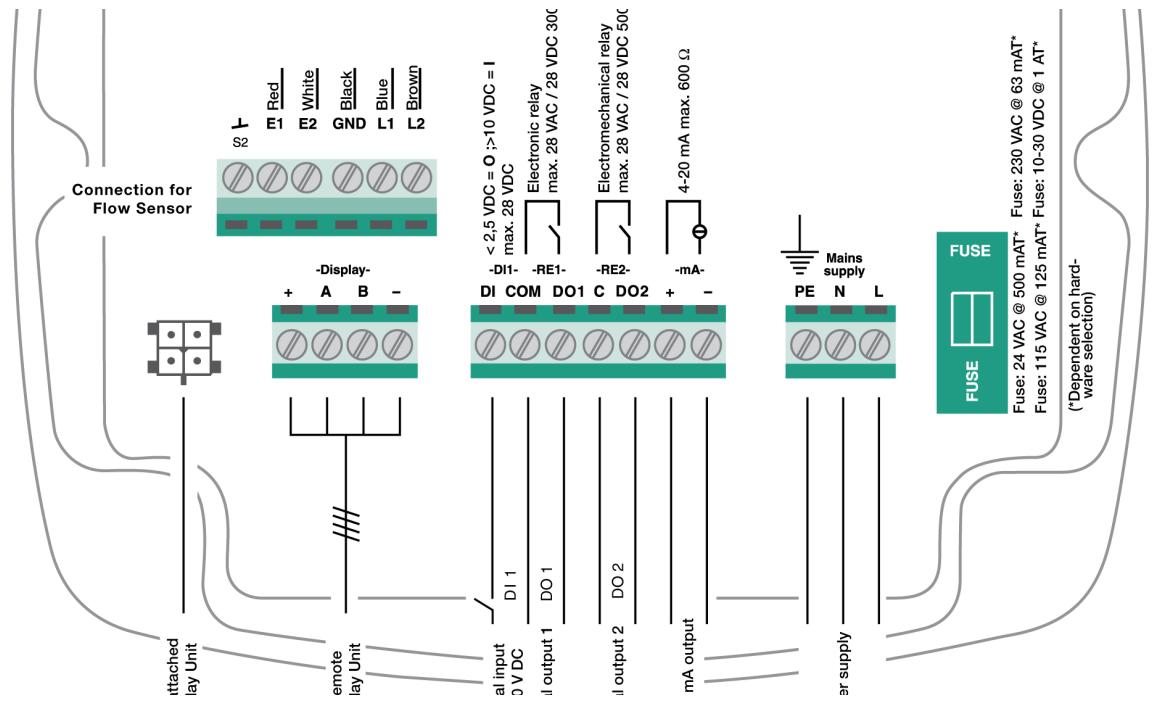

Dimensions Millimeter

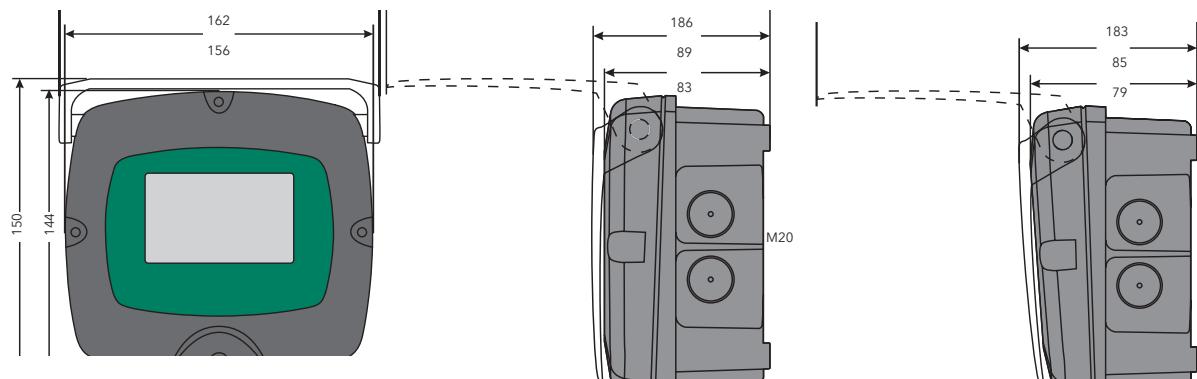

Dimensions Inch

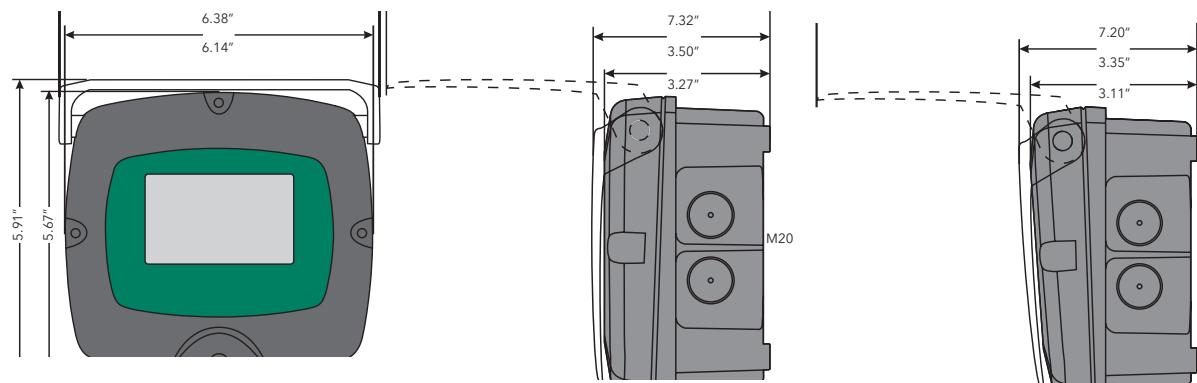

MagFlux® Electromagnetic Flow Meter

Accessories

579035
MagFlux®
Gel potting kit
 f/ sensor IP68

As standard, MagFlux® is supplied with protection class IP67. However, if you use our gel potting kit, you can increase the protection class to IP68 (which means that MagFlux® Sensor can withstand submersion in water (max. 10 m water column pressure).



207932
Steel Cover for Field Cabinet (small)

Stainless steel protective cap and fittings set. Protects MagFlux®, Oxix and SuSix from falling objects, branches, etc. Stainless steel (SS316).



200242
Mounting Plate, Field Cabinet (small)

Makes it possible to fit MagFlux® Converter to an uneven surface. Mounting plate is compatible with universal bracket. Can also be used to mount converter on pipe or stand.



207935
Panel Mounting Bracket for MagFlux®, SuSix® & Oxix®

Bracket specially designed for narrow or wide converter cabinet. For fitting cabinet in panel front.



500220/500221
Cover for Field Cabinet (small) Transparent/Opaque

Protects MagFlux® Display from strong sunlight/rain/contact.




205546
Modbus® & RS 485 Communications Module

To communicate with an external Modbus® network. For mounting in the MagFlux® Display. The MJK Modbus® Communication Module separates the internal network from the external network, e.g. to a PLC. The module can transmit data from four interconnected MJK transmitters.




205547
Profibus Communications Module

To communicate with an external PROFIBUS® network, we supply a Profibus DP module suitable for mounting in the MagFlux® Display. The MJK PROFIBUS® Communication Module can transmit data from four interconnected MJK transmitters.

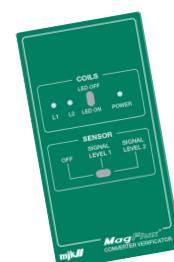

207980
MagFlux® Verificator

MagFlux® Converter Verificator, simulates the coil and electrode functions of the MagFlux® Sensor for testing of the readings at zero and high flow rates on the converter.



207937
Surge Arresters for MagFlux®

Surge Arresters to protect converters and displays from lightning transmitted in pipes.



691080
Cable for MagFlux® Sensor

(2x2+1) x 1.0mm² (AWG 18/19)
 Colours: Red, white, blue, brown, black PUR

691095
USB Cable

PC Mini USB/USB cable

MagFlux® Electromagnetic Flow Meter

**Specifications
Converter and
Display Unit**

Display	
Display	Graphic background-lit LCD-display (64 x 128 pixels) with soft keys
Display Indication	Indication of flow , flow direction, volume, totalizers, configuration and graph
Power Supply	From MagFlux® Converter
Clock	Real-time clock with built-in lithium battery (lifetime 10 years@20°C)
Communication	MODBUS® RTU-mode, 9600 baud, 2-wire RS 485, master-mode
Interface	1 pcs. RS-485 Modbus® RTU-mode 1 pcs. USB 1,1 type mini B, female 1 pcs. for Communication module
Memory Storage	Flash memory, 345.000 loggings incl. date, time and value (curve display)
Enclosure Rating	IP 67, NEMA 6
Material	Housing: Glass-reinforced Polycarbonate Protection Lid: Transparent Polycarbonate
Temperature Range	- 20 ... 60 °C / - 5 ... 150°F
Operating Relative Humidity	Max. 85% Noncondensing
Weight	0,5 kg / 1.1lb

Converter	
Accuracy	+/- 0,1% of reading
Repeatability	+/- 0,1%
Min. Liquid Conductivity	≥ 5 µS
Power Supply	24 V AC, 50 / 60 Hz ± 10 % or 230 (115) V AC, 50 / 60 Hz ± 10 % or 10-30 VDC
Power Consumption	Max. 10 W
Internal Communication	MODBUS® RTU-mode
External Communication	MODBUS® RTU-mode, 9600 baud, 2-wire RS 485, slave-mode
Interface	1 pcs. RS 485 for connection to Display Unit or PLC
Analog Output	1 pcs. Active 4 - 20 mA, galvanically isolated, 10 bit resolution, (max. load 600 Ω) MagFlux® only: Range = 0-10 m/s (0-32,80 ft/s) MagFlux® Q only: Range = 0-8 m/s (0-26,25 ft/s)
Digital Outputs	1 pcs. Voltage-free electromechanical relay (max. 28 VAC/ 28 VDC /500 mA) 1 pcs. Optically isolated MOSFET relay (max. 28 VAC/ 28 VDC/300 mA) Programmable for: Totalizer counter, batch counter, high/low flow, empty pipe and flow direction.
Digital Inputs	One, max. 28 V DC, < 2,5 V DC = 0 (low), > 10 V DC = 1 (high), pulse length > 100 ms
Enclosure Rating	IP 67, NEMA 6
Material	Glass-reinforced Polycarbonate
Temperature Range	- 20 ... 60 °C / - 5 ... 150°F
Weight	1,0 kg / 2.2lb
Approvals	cUL (only 115 VAC/230 VAC versions) CE approvals EN 61000-6-4:2007-02-14, EN 61000-6-2:2005-09-08

Connection Box	
Enclosure Rating	IP 68, NEMA 6X (using gel potting kit part no. 579035). The MagFlux® Flow Meter can withstand unlimited immersion of up to 10 m of water.
Material	Glass-reinforced Polycarbonate
Temperature Range	- 20 ... 100 °C / - 5 ... 212°F

MagFlux® Electromagnetic Flow Meter

Order Numbers	MagFlux® Converter	
	Sensor mounted converter with display	
207920		MagFlux® Converter w/display unit for sensor mounting 230VAC
297920		MagFlux® Converter w/ Display unit Sensor mounting 115VAC
207921		MagFlux® Converter w/display unit for sensor mounting, 24VAC
207922		MagFlux® Converter w/display unit for sensor mounting, 10-30VDC
	Sensor mounted converter without display	
207910		MagFlux® Converter w/o display unit for sensor mounting 230VAC
297910		MagFlux® Converter w/o display sensor mounting, 115VAC
207911		MagFlux® Converter w/o display unit for sensor mounting, 24VAC
207912		MagFlux® Converter w/o display unit for sensor mounting, 10-30VDC
	Sensor wall mounted converter with display	
207925		MagFlux® Converter w/display unit for wall mounting, 230VAC
297925		MagFlux® Converter w/ display unit for wall mounting 115VAC
207926		MagFlux® Converter w/display unit for wall mounting, 24VAC
207927		MagFlux® Converter w/display unit for wall mounting, 10-30VDC
	Sensor wall mounted converter without display	
207928		MagFlux® Converter w/o display unit for wall mounting, 230VAC
297928		MagFlux® Converter w/o display unit for wall mounting, 115VAC
207929		MagFlux® Converter w/o display unit for wall mounting, 10-30VDC
Accessories		
106010		Cable mounting and potting of MagFlux® Sensor, incl. 579035 e. cable
109114		MID certificate for MagFlux 7200 DN25-DN400
200062		Complete MagFlux® cabinet with blind lid, sensor mounted
200242		Mounting plate, Field Cabinet (small)
205546		Modbus and RS 485 communications module
205547		Profibus DP communication module
207930		Wall mounting kit for MagFlux®, SuSix® and Oxix®
207932		Steel Cover for Field cabinet (small)
207935		Panel Mounting Bracket for MagFlux®, SuSix® and Oxix®
207936		Panel Mounting Bracket for wide Cabinet
207937		Surge Arrester for MagFlux® for wall mounting
207938		Surge Arrester for MagFlux® for sensor mounting
207940		Display Unit for MagFlux®, SuSix®, Oxix®
207980		MagFlux® Converter Verificator
500220		Cover for Field Cabinet (small) transparent
500221		Cover for Field Cabinet (small) Opaque
571025		Packing 65 / 40mm for MagFlux QUAD PORON11 3.2mm m. mounting tape (only MagFlux® Q)
579035		MagFlux® Gel potting kit f/ sensor IP68 NEMA6P
691075		Communication cable 2X2X0,5mm2 (AWG24) Shielded twisted pair
691080		Cable for MagFlux® sensor, pr m
691095		PC Mini USB/USB Cable
691098		USB mini/USB mini, plug for cabinet 0,2m cable
840110		MJK Field-Link

MagFlux® Electromagnetic Flow Meter

Flow Sensor Ordering Information



20 72 31 – 016 – 00

Type of flange (Fit for Wafer): _____

20: EN-1092-1
 24: KSD4308
 25: KSD3578
 26: JIS B2220/KS B1503 / KS D4308
 28: AS 4087-2004 & AS 2129-2000
 29: ANSI B16.5 ½"-24"/AWWA C207-01 28"-54"

Series information: _____

71: 7100 Flanged PTFE/PFA
 72: 7200 Flanged Hard rubber
 82: 8200 Flanged PPS Fortron

Size: _____
 ID for identifying the size. (2071XX)
 See Order numbers table

Material - Electrodes:
 x0: Stainless steel 316TI (default)
 x1: Hastelloy C electrode
 x2: Titanium electrode
 x3: Platinum iridium alloy electrode

Material - Housing and flanges:
 0x: Housing and Flanges,
 painted Carbon steel (default)
 1x: Housing and flanges,
 polished stainless steel 316
 2x: Housing and flanges,
 polished stainless steel 304,
 3x: Housing polished stainless steel 304,
 flanges painted carbon steel
 4x: Housing and Flanges,
 PPS Fortron
 9x: Housing polished stainless steel 316
 flanges painted carbon steel

Pressure class:
 if EN use PN (e.g. 016 for PN16)
 if KS use PN (e.g. 016 for PN16)
 if AS use PN (e.g. 016 for PN16)
 if ANSI use psi (e.g. 150 for psi150)
 if AWWA use psi (e.g. Class D for psi150)

Also try our online MagFlux® sensor configurator:
<http://magflux.dlk/> which can help you select the correct MagFlux® Flow Meter for your needs.


MagFlux® Electromagnetic Flow Meter

Dimensions

Magflux® 7100/7200

Sensor

EN 1092-1

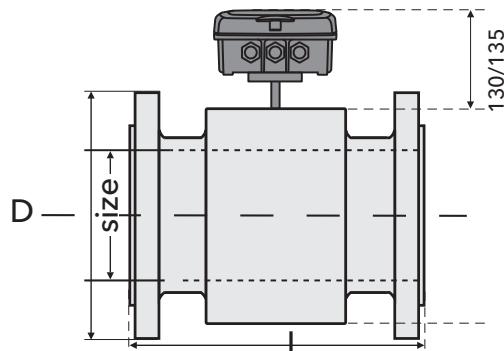

Dimensions

Magflux® 7100/7200 Sensor Sizes and Dimensions Information

Size	Pressure	D	L	Weight
DN	PN	[mm]	[mm]	[kg]
EN 1092-1 Flanges				
15	1/2"	40	95	200
20	3/4"	40	105	200
25	1"	40	115	200
32	1 1/4"	40	140	200
40	1 1/2"	40	150	200
50	2"	16	165	200
65	2 1/2"	16	185	200
80	3"	16	200	200
100	4"	16	220	250
125	5"	16	250	250
150	6"	16	285	300
200	8"	16	340	350
250	10"	10	395	450
300	12"	10	445	500
350	14"	10	505	550
400	16"	10	565	600
450	18"	10	615	600
500	20"	10	670	600
600	24"	10	780	600
700	28"	10	895	700
800	32"	6	975	800
900	36"	6	1075	900
1000	40"	6	1175	1000
1200	48"	6	1405	1200
1400		6	1630	1400

Consult MJK for information on additional pressure classes


MagFlux® Electromagnetic Flow Meter

Dimensions

Magflux® 7100/7200

Sensor

AS 2129 & 4087

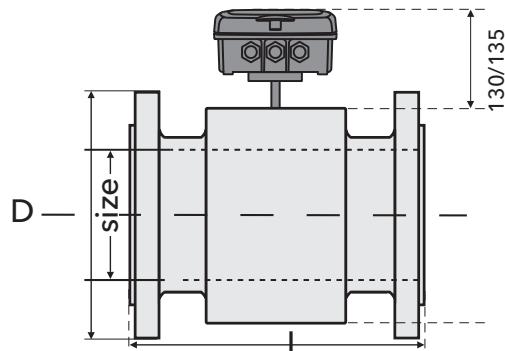

**Magflux® 7100/7200 Sensor
Sizes and Dimensions Information**

Size		Pressure	D	L	Weight
DN	PN	[mm]	[mm]	[kg]	
AS 2129 Flanges					
15	1/2"	PN16	95	200	3,5
20	3/4"	PN16	100	200	3,5
25	1"	PN16	115	200	3,5
32	1 1/4"	PN16	120	200	6
40	1 1/2"	PN16	135	200	7

Consult MJK for information on additional pressure classes

**Magflux® 7100/7200 Sensor
Sizes and Dimensions Information**

Size		Pressure	D	L	Weight
DN	PN	[mm]	[mm]	[kg]	
AS 4087 Flanges					
50	2"	14	150	200	8
65	2 1/2"	14	165	200	10
80	3"	16	185	200	12
100	4"	16	215	250	16
125	5"	16	255	250	21
150	6"	16	280	300	28
200	8"	16	335	350	35
225		16	370	450	38
250	10"	16	405	450	43
300	12"	16	455	500	55
350	14"	16	525	550	66
375		16	550	600	70
400	16"	16	580	600	94
450	18"	16	640	600	105
500	20"	16	705	600	122
600	24"	16	825	600	158
700	28"	16	910	700	230
750	30"	16	995	750	275
750*	30"	16	937	750	275
800	32"	16	1060	800	325
900	36"	16	1175	900	420
1000	40"	16	1255	1000	510
1200	48"	16	1490	1200	680

Consult MJK for information on additional pressure classes

*) Built-in length, L=937mm


MagFlux® Electromagnetic Flow Meter

Dimensions

Magflux® 7100/7200

Sensor

ANSI & AWWA

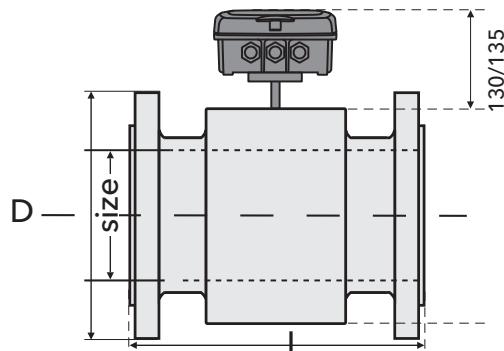

Magflux® 7100/7200 Sensor Flanges
Sizes, Pressure and Dimensions Information

Size	Pressure	D	L	Weight
Inch	[PSI]	[in]	[in]	[lb]
ANSI B 16.5				
½"	150	3.50	7.9	8
¾"	150	3.88	7.9	8
1"	150	4.25	7.9	8
1¼"	150	4.62	7.9	13
1½"	150	5.00	7.9	15
2"	150	6.00	7.9	18
2½"	150	7.00	7.9	22
3"	150	7.50	7.9	26
4"	150	9.00	9.8	35
5"	150	10.00	9.8	46
6"	150	11.00	11.8	62
8"	150	13.50	13.8	77
10"	150	16.00	17.7	95
12"	150	19.00	19.7	121
14"	150	21.00	21.7	146
16"	150	23.50	23.6	207
18"	150	25.00	23.6	231
20"	150	27.50	23.6	269
24"	150	32.00	23.6	348
AWWA C207-01				
28"	Class D	36.50	23.6	507
32"	Class D	41.75	31.5	717
36"	Class D	46.00	31.5	926
40"	Class D	50.75	31.5	1124
48"	Class D	59.50	39.4	1499

Consult MJK for information on additional pressure classes

Magflux® 7100/7200 Sensor Flanges
Sizes, Pressure and Dimensions Information

Size	Pressure	D	L	Weight
Inch	[PSI]	[in]	[in]	[lb]
ANSI B 16.5				
½"	300	3.75	7.9	8
¾"	300	4.62	7.9	8
1"	300	4.88	7.9	8
1¼"	300	5.25	7.9	13
1½"	300	6.12	7.9	15
2"	300	6.50	7.9	18
2½"	300	7.50	7.9	22
3"	300	8.25	7.9	26
4"	300	10.00	9.8	35
5"	300	11.00	9.8	46
6"	300	12.50	11.8	62
8"	300	15.00	13.8	77
10"	300	17.50	17.7	95
12"	300	20.50	19.7	121
14"	300	23.00	21.7	146
16"	300	25.50	23.6	207
18"	300	28.00	23.6	231
20"	300	30.50	23.6	269
24"	300	36.00	23.6	348
AWWA C207-01				
28"	Class E	36.50	23.6	507
32"	Class E	41.75	31.5	717
36"	Class E	46.00	31.5	926
40"	Class E	50.75	31.5	1124
48"	Class E	59.50	39.4	1499

Consult MJK for information on additional pressure classes

MagFlux® Electromagnetic Flow Meter

MagFlux® 7200 Sensor



The liner of MagFlux® 7200 is hard rubber for general water purpose usage.

Applications



MagFlux® 7200 with hard rubber lining is an all-round sensor for water and wastewater applications.

Specifications

MagFlux® 7200 Sensor

MagFlux® 7200 Sensor Specifications	
Mounting Flanges ①	EN-1092-1 / ANSI B 16.5 / AWWA C207-01 / AS 4087 / AS 2129
Built-in Length	Standard length according to EN/ISO 20456:2019
Accuracy ②	Better than $\pm 0,25\%$ @ 0,2 - 10 m/s
Ratio	1:100
Measuring Frequency	1,25-2,5 Hz
Materials	
Housing ①	Carbon steel
Flanges ①	Carbon steel
Measuring Pipe	Steel 1.4301 / AISI 304
Lining	Hard Rubber
Electrodes ③④	Steel 1.4571 / AISI 316 TI
Coating	3 layers Polyurethane paint, thickness $\geq 310\ \mu\text{m}$
Temperature Range	
Medium Temperature	-10...80 °C / 15...175 °F
Ambient Temperature Sensor: Compact Converter Remote Converter	-10...60 °C / 15...140 °F -10...80 °C / 15...175 °F
Enclosure	IP 67, NEMA 4, standard IP 68, NEMA 6P (10m Wc, using the Gel potting kit 579035)
Approvals	MID: MagFlux 7200 series DN 25-400 Type examination certified. Document No. SK 13-MI001-SMU028
	 MCERTS (Sira MC160314/00) : Only applies to EN 1092-1 DN 25 to 400. The instrument was evaluated for use under the following conditions: Ambient Temperature Range: -10°C to +55°C
	 WRAS: Approval number: 1601028
	 NSF-61: only applies to ANSI B 16.5 flanges size 3/4" to 48". The instrument was evaluated for use under the following conditions: Ambient Temperature Range: -10°C to +55°C ⑤

①Also available in Steel 304/316 SS. See MagFlux® Flow Sensor Ordering information.

②Of measured value.

③Options: Hastelloy C4, platinum, and titanium. See MagFlux® Flow Sensor Ordering information.

④Incl. built-in ground electrode.

⑤NSF-61 only applies if sold and shipped from ysi.com North America (see backpage).

MagFlux® Electromagnetic Flow Meter

Sizes, Pressure and
Order Numbers
7200 Sensor
EN 1092-1

EN 1092-1 Flanges					
Size \ PN	PN6	PN10	PN16	PN25	PN40
20	¾"				207210-040-00
25	1"				207213-040-00
32	1¼"				207216-040-00
40	1½"				207219-040-00
50	2"		207222-016-00		207222-040-00
65	2½"		207225-016-00		207225-040-00
80	3"		207228-016-00		207228-040-00
100	4"		207231-016-00		207231-040-00
125	5"		207234-016-00		207234-040-00
150	6"		207237-016-00	207237-025-00	207237-040-00
200	8"	207240-010-00	207240-016-00	207240-025-00	207240-040-00
250	10"	207243-010-00	207243-016-00	207243-025-00	207243-040-00
300	12"	207246-010-00	207246-016-00	207246-025-00	207246-040-00
350	14"	207249-010-00	207249-016-00	207249-025-00	207249-040-00
400	16"	207252-010-00	207252-016-00	207252-025-00	207252-040-00
450	18"	207255-010-00	207255-016-00		
500	20"	207258-010-00	207258-016-00		
600	24"	207261-010-00	207261-016-00		
700	28"	207264-006-00	207264-010-00	207264-016-00	
800	32"	207267-006-00	207267-010-00	207267-016-00	
900	36"	207270-006-00	207270-010-00	207270-016-00	
1000	40"	207272-006-00	207272-010-00		
1200	48"	207276-006-00	207276-010-00		
1400		287278-006-00			

Sizes, Pressure and
Order Numbers
7200 Sensor
ANSI & AWWA

Magflux® 7200 Sensor Sizes, Pressure and Order Number		
ANSI B 16.5 Flange		
Size \ PSI	150 [PSI]	300 [PSI]
¾" ①	297210-150-00	297110-300-00
1" ①	297213-150-00	297113-300-00
1¼" ①	297216-150-00	297116-300-00
1½" ①	297219-150-00	297119-300-00
2" ①	297222-150-00	297222-300-00
2½" ①	297225-150-00	297225-300-00
3" ①	297228-150-00	297228-300-00
4" ①	297231-150-00	297231-300-00
5" ①	297234-150-00	297234-300-00
6" ①	297237-150-00	297237-300-00
8" ①	297240-150-00	297240-300-00

Magflux® 7200 Sensor Sizes, Pressure and Order Number		
ANSI B 16.5 Flange		
Size \ PSI	150 [PSI]	300 [PSI]
10" ①	297243-150-00	297243-300-00
12" ①	297246-150-00	297246-300-00
14" ①	297249-150-00	297249-300-00
16" ①	297252-150-00	297252-300-00
18"	297255-150-00	297255-300-00
20"	297258-150-00	297258-300-00
24"	297261-150-00	297261-300-00
AWWA C207-01	Class D	Class E
28"	297264-150-00	297264-300-00
32"	297267-150-00	297267-300-00
36"	297270-150-00	297270-300-00
40"	297273-150-00	297273-300-00

① NSF-61 only applies to ANSI B 16.5 flanges size 3/4" to 48"



Certified to
NSF/ANSI/CAN 61
& NSF/ANSI 372

MagFlux® Electromagnetic Flow Meter


Sizes, Pressure and
Order Numbers
7200 Sensor
AS 2129 & AS 4087

AS 2129 Flanges			
Size	PN16	PN21	PN35
15	287207-016-00		
20	287210-016-00	287210-021-00	
25	287213-016-00	287213-021-00	
32	287216-016-00	287216-021-00	
40	287219-016-00		
AS 4087 Flanges			
50	287222-016-00	287222-021-00	287222-035-00
65	287225-016-00	287225-021-00	287225-035-00
80	287228-016-00	287228-021-00	287228-035-00
100	287231-016-00	287231-021-00	287231-035-00
125	287234-016-00	287234-021-00	287234-035-00
150	287237-016-00	287237-021-00	287237-035-00
200	287240-016-00	287240-021-00	287240-035-00
225	287241-016-00		
250	287243-016-00	287243-021-00	287243-035-00
300	287246-016-00	287246-021-00	287246-035-00
350	287249-016-00	287249-021-00	287249-035-00
375	287250-016-00		
400	287252-016-00	287252-021-00	287252-035-00
450	287255-016-00	287255-021-00	287255-035-00
500	287258-016-00	287258-021-00	287258-035-00
600	287261-016-00	287261-021-00	287261-035-00
700	287264-016-00	287264-021-00	
750	287265-016-00	287265-021-00	
750*	287266-016-00		
800	287267-016-00		
900	287270-016-00		
1000	287273-016-00		
1200	287276-016-00		

*) build-in length, L=937mm

MagFlux® Electromagnetic Flow Meter

Grounding Rings

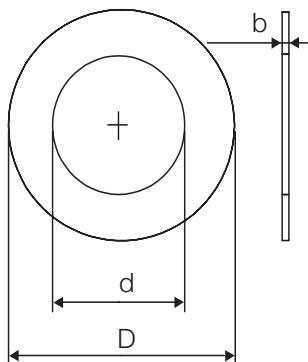

Grounding ring example



Sizes and Ordering Information

Grounding Rings Sizes and Ordering Information

DN	Size		D ^① [mm]	d [mm]	b [mm]	Weight [kg]
	[inch]	Order no.				
15	½"	207807	50	22	6	0,08
20	¾"	207810	58	28	6	0,08
25	1"	207813	68	35	6	0,12
32	1¼"	207816	79	43	6	0,16
40	1½"	207819	91	49	6	0,20
50	2"	207822	106	61	6	0,26
65	2½"	207825	126	77	6	0,40
80	3"	207828	141	90	6	0,44
100	4"	207831	170	115	6	0,56
125	5"	207834	191	141	6	0,60
150	6"	207837	237	170	6	0,90
200	8"	807840	272	220	6	0,96
250	10"	207843	333	274	6	1,30
300	12"	807846	405	325	6	2,00
350	14"	207849	443	360	6	2,48
400	16"	207852	521	411	6	3,60
450	18"	207855	546	463	6	3,20
500	20"	207858	602	514	6	3,64
600	24"	207861	713	615	6	4,70
700	28"	207862				
750	30"	207863				
800	32"	207867				

① maximum measurement

Specifications

Grounding Rings Specifications

Material	AISI 316 SS
Wire	2,5 mm ² / AWG 13

MagFlux® Electromagnetic Flow Meter

Flow Sensor Sizing

Min. / Max. Flow and Default mA Settings		Min and Max Flow Imperial					
Size		Qmin = 0,2 m/s	Qmax= 10 m/s	20 mA	Size	Qmin 0.6 ft./s	Qmax 30 ft./s
DN	[inch]	[l/h]			[inch]	[GPM]	
15	½"	127	6362	5000	½"	0.559	28.0
20	¾"	226	11304	10000	¾"	0.995	49.76
25	1"	353	17676	20000	1"	1.550	77.82
32	1 ¼"	578	28944	30000	1 ¼"	2.549	127.4
40	1 ½"	905	45360	50000	1 ½"	3.984	199.7
50	2"	1414	70560	75000	2"	6.226	310.7
-	-	[m³/h]	[m³/h]	[m³/h]			
65	2 ½"	2,39	119	100	2 ½"	10.52	523.9
80	3"	3,62	181	200	3"	15.93	796.9
100	4"	5,65	283	300	4"	24.87	1246
125	5"	8,84	442	400	5"	38.92	1946
150	6"	12,7	636	600	6"	55.91	2800
200	8"	22,6	1131	1000	8"	99.50	4,979
250	10"	35,3	1767	2000	10"	155.4	7,780
300	12"	50,9	2545	2500	12"	224.1	11,205
350	14"	69,3	3464	3000	14"	305.1	15,258
400	16"	90,5	4524	4500	16"	398.5	19,919
450	18"	115	5726	6000	18"	506.3	25,210
500	20"	141	7069	7000	20"	620.8	31,120
600	24"	204	10179	10000	24"	999.1	44,910
700	28"	277	13854	15000	28"	1220	74,920
800	32"	362	18095	20000	32"	1594	79,620
900	36"	458	22902	25000	36"	2017	100,800
1000	40"	565	28274	30000	40"	2497	124,500
1200	48"	814	40715	40000	48"	3584	179,300

20mA output is factory preset to Qmax

To calculate the correct size of the MagFlux® Flow Sensor the recommended flow velocity should be between 1 and 3 m/s (3 and 10 ft/s). The flow curves

and graphs on the following page illustrate how the size of the MagFlux® Flow Sensor is calculated to get the required measuring accuracy.

Example:

A volume of 50 m³/h (220 GPM) is running through a DN100 pipe that measures 4" in internal diameter. To select the correct MagFlux® Flow Sensor, the liquid velocity should be in the range 1 - 3 m/s for 50 m³/h (3 ft/s - 10 ft/s for 220 GPM.)



If a MagFlux® Flow Sensor with the same inner

diameter as the DN100 pipe is selected (4"), the flow velocity will be 1.5 m/s (4.9 ft/s) at a flow rate of 42 m³/h (200 GPM). The diagram and the table in the following also shows that a flow between 5.6 m³/h and 283 m³/h (24.87 and 1.246 kGPM) can be measured.

MagFlux® Electromagnetic Flow Meter


Flow / Velocity
Graph (metric)

Nominal diameter of MagFlux® Flow Sensor

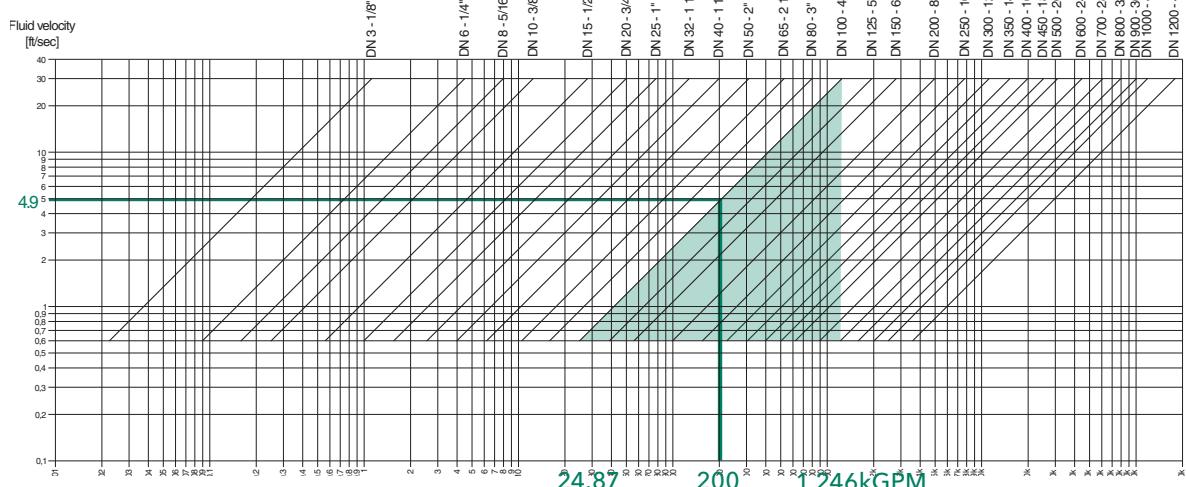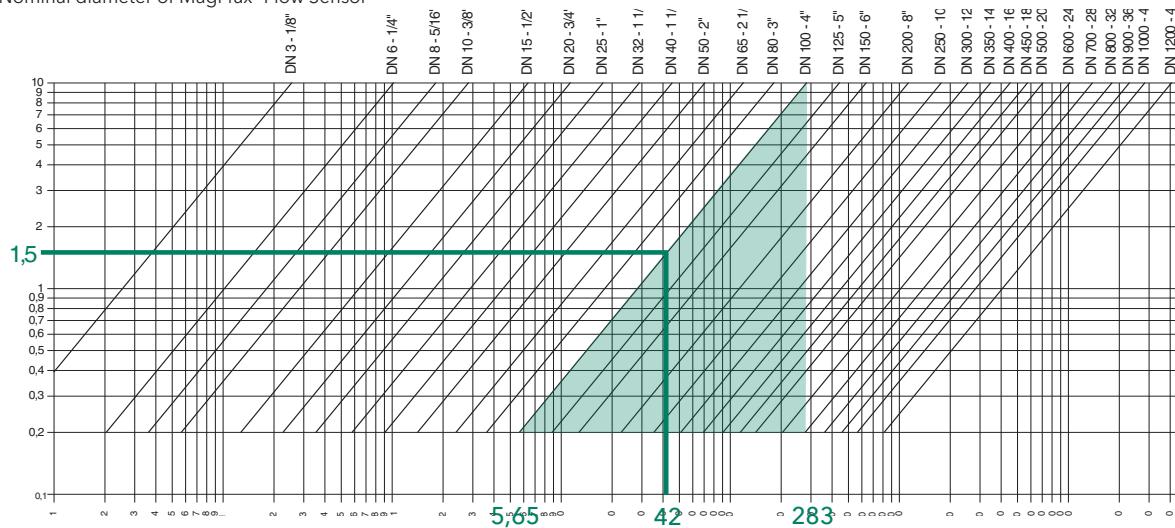

Measurement
Accuracy

Accuracy

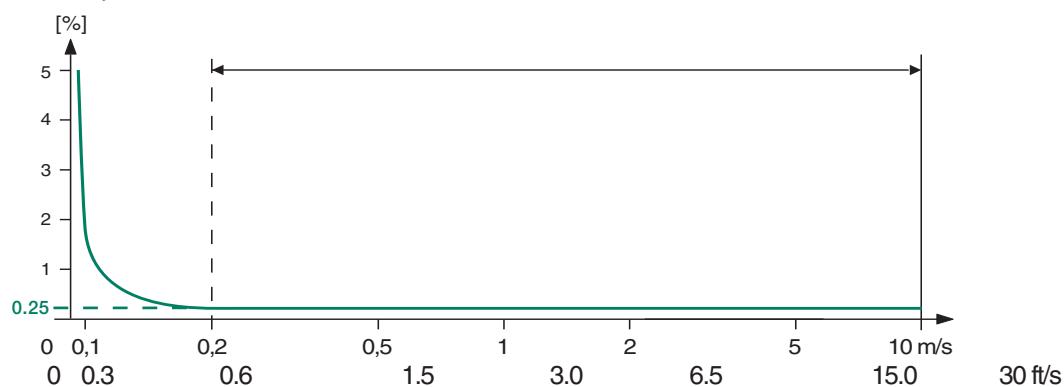


Example:


If a 100 mm MagFlux® Flow Sensor is selected, the diagram shows the available measuring accuracy between 0.2 - 10 m/s or 0.6 - 30 ft/s (here: 0.25%).

MagFlux® Electromagnetic Flow Meter

Reducing the Flow Meter Size

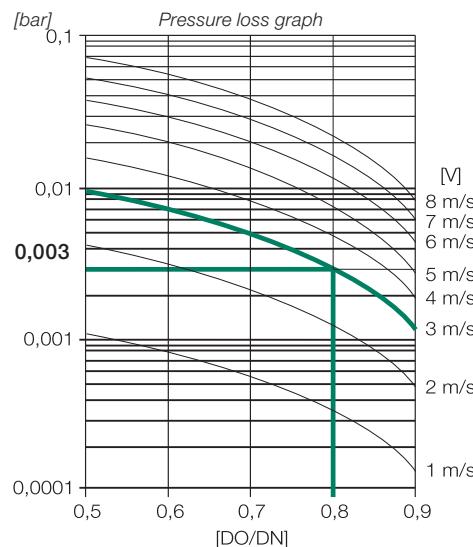


When the size of the MagFlux® Flow Meter is reduced to cause the flow to reach a sufficient velocity, the pipe size has to be reduced. This will cause a pressure loss which can be calculated using

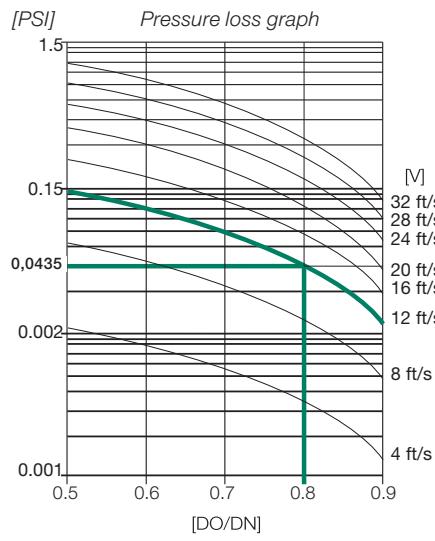

the pressure loss graph at the right.
When the MagFlux® Sensor is smaller than nominal pipe diameter, the pressure loss can be checked, using the pressure loss chart.

Reducing the Flow Meter Size

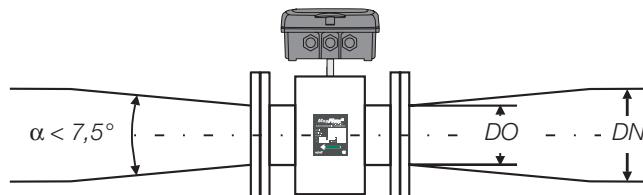


A MagFlux® Flow Sensor with an internal diameter of 80 mm is selected and the pipe size is 100 mm. Consequently, the fluid velocity for a flow of approximately 50m³/h will increase to approximately

3 m/s. Using a DN80 mm MagFlux® Flow Sensor also leads to a smaller measurement range (3.62 m³/h - 181 m³/h). The diagram shows that reducing the pipe size from 100 to 80 mm will cause a pressure loss of 3 mbar (0,003 bar).


Mounting Data

Accurate flow measurement requires a minimum of three pipe diameters of straight pipe upstream and two pipe diameters of straight pipe downstream from the center of the MagFlux® Flow Sensor.

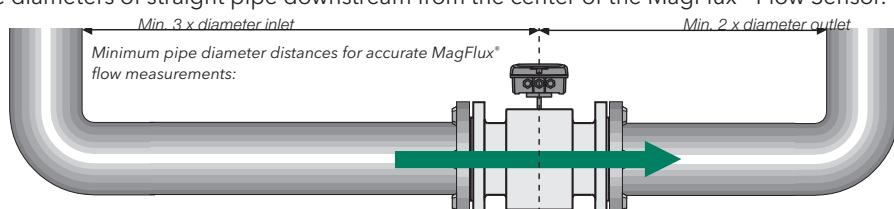

When installing a magnetic inductive flow meter, it is important to comply with the installation criteria described here: The mentioned respect distances for up/downstream flow respectively, are minimum requirements. If your installation has an already turbulent flow profile due to bends, valves, plug-in fittings etc. in the pipe installation, it may be necessary with a longer respect distance than stated in the data sheet. For the meter to comply with its measuring accuracy, these respect distances apply both before and after the meter. If in doubt about the installation and the respective respect distances, please contact [MJK support hotline](#). We are happy to assist and advise on the optimal location of the flow meter according to your application.

For **MagFlux® 8200 Q**, a special design allows using short build-in construction but still providing very accurate flow measurements even at one pipe diameter of straight pipe upstream and one pipe diameter of straight pipe downstream from the center of the MagFlux® Flow Sensor.

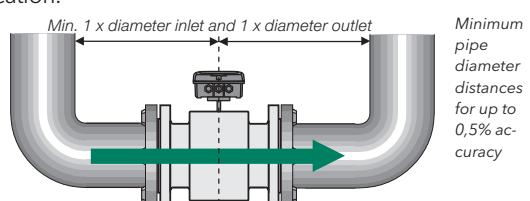


MagFlux® Electromagnetic Flow Meter

Online Information

Find the latest updated product information, video tutorials and a lot more on the website.

Use the QR code to find the website. If you use the digital version of the datasheet, just click to go straight to the electromagnetic flow measurement area.

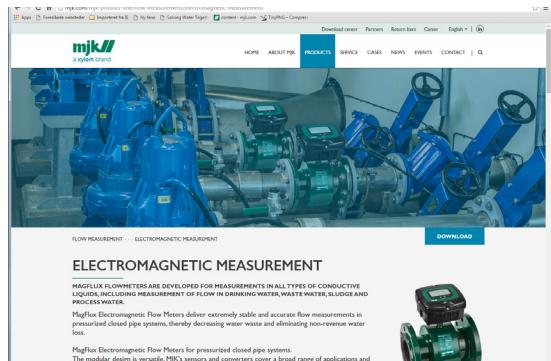

Also try our online MagFlux® sensor configurator:
<http://magflux.dk/> which can help you select the correct MagFlux® Flow Meter for your needs.

For sales and support in North Americas, please contact:

YSI
 1700/1725 Brannum Lane
 Yellow Springs, Ohio 45387
 Tel. +1 937 767 7241 x 768

environmental@ysi.com
www.YSI.com